

Self recuperative burner REKUMAT® M300

gross capacity (based on lower heating value)

nominal (standard):	200 kW
min./max. capacity (opt.):	160 kW / 240 kW
max. (special design):	250 kW

Fuel

Natural gas (standard):	natural gas, methane
other (option):	propane, butane und other dust-free non aggressive, clean gases

Supply pressure

fuel:	6000 Pa (60 mbar), $\pm 5\%$
Combustion air:	8000 Pa (80 mbar), $\pm 5\%$

max. furnace temperatures

direct firing:	1150°C
indirect heating:	1000°C

flame safety

ionisation (standard):	one electrode for ignition and ionisation each
UV-cell (option):	the burner is prepared to accept a UV-cell

combustion mode:

FLOX®/Flame (stand.):	above approx. 850°C in FLOX® mode
FLOX®/Flame	
air staged high velocity:	above approx. 850°C in FLOX® mode FLOX®:
(option)	only FLOX® mode above 850°C
Flame (option):	Flame mode (air staged high velocity)

burner control

on / off

recuperator


finned (standard):	fitting length 600mm
finned (option):	fitting length 500 / 700mm



customization is possible

© 2001

Self recuperative burner REKUMAT® M300

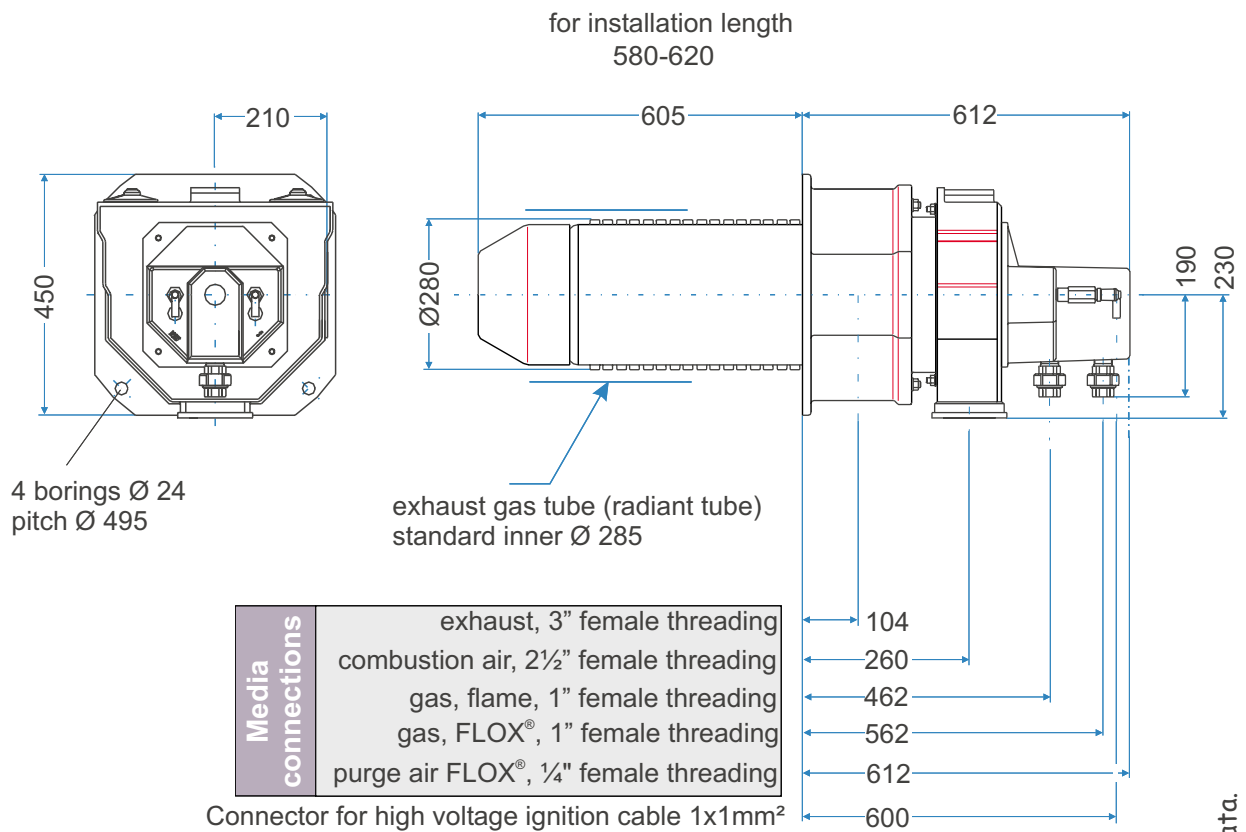

Possible orientation for media connections

The media connections for:

- exhaust gas
- combustion air
- gas, purge air

may be rotated in 90° intervals to achieve the desired orientation



customization is possible

© 2001